

**APPLICATIONS**

- With liquid filled case for applications with high dynamic pressure pulsations or vibrations
- Suitable for corrosive environments and gaseous or liquid media that will not obstruct the pressure system
- Process industries: chemical/petro-chemical, power stations, mining, on- and offshore, environmental technology, mechanical engineering and plant construction




**SPECIAL FEATURES**

- Excellent load-cycle stability and shock resistance
- All stainless steel construction
- Scale ranges up to ... 1600 bar

**TECHNICAL DATA**

Scale ranges:	Ø63	0 ÷ 0,6 bar to 0 ÷ 1000 bar
	Ø100	0 ÷ 0,6 bar to 0 ÷ 1600 bar
	Ø160	0 ÷ 0,6 bar to 0 ÷ 1600 bar
Case (IP65):	Ø63, Ø100, Ø160 – stainless steel 1.4301	
Pressure element:	stainless steel 1.4571	
Pressure connection:	G1/4, M12 x 1,5 (Ø63)	
	G1/2, M20 x 1,5(Ø100 i Ø160)	
Accuracy class	1,6% (Ø63)	
	1,0 (Ø100 i Ø160)	

## ORDERING INFORMATION

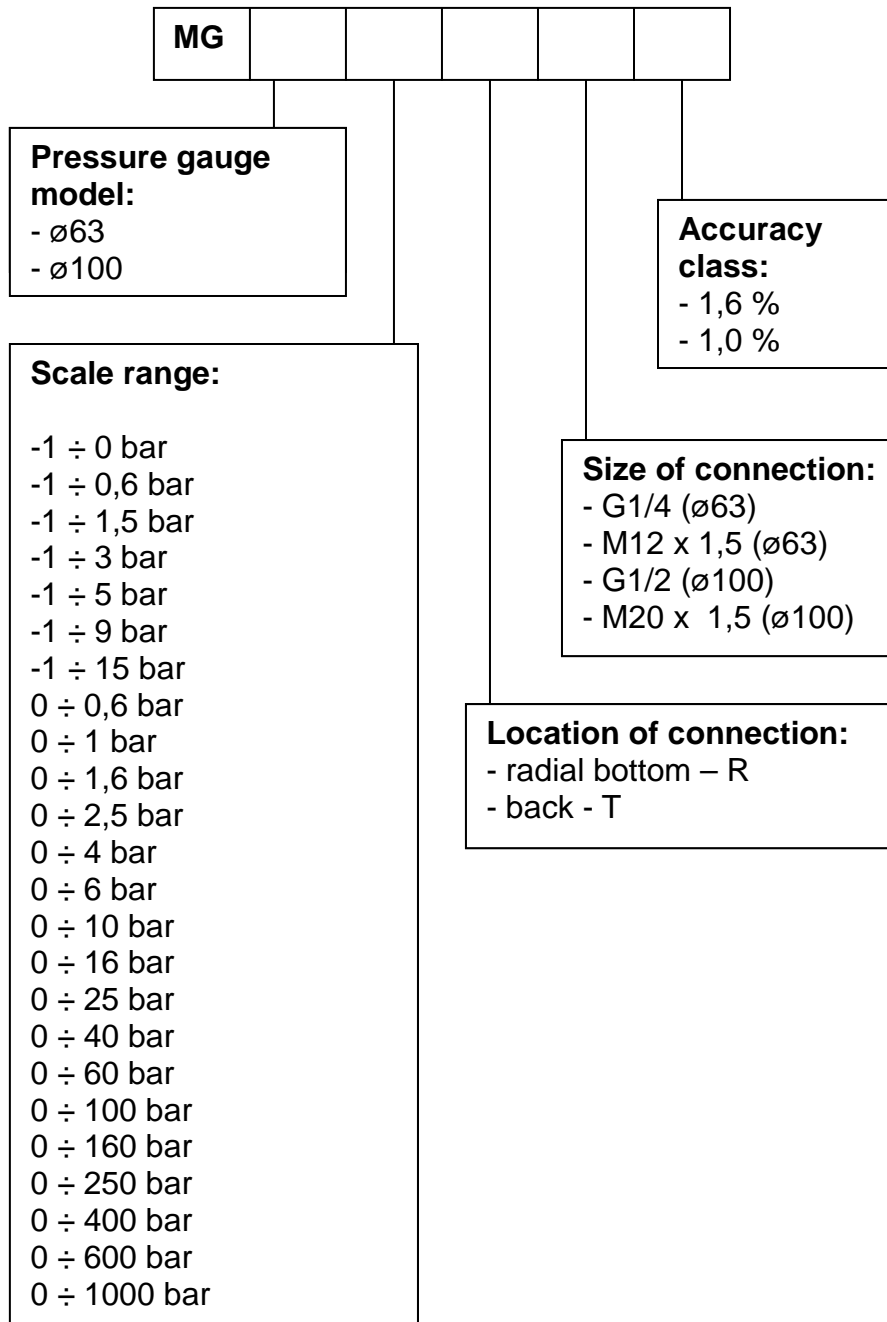

**Ordering example:** MG – 63 - ( 0-2,5 MPa ) – R - G1/4" - 1,6